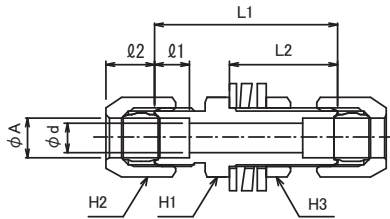


**リング式銅管継手(計装用)**
**締付型フレヤードユニオン**


型 式	銅管外径 A (mm)	本体長さ		最小穴径 d (mm)	差込深さ		対 辺			貫通穴 (mm)
		L1 (mm)	L2 (mm)		φ1 (mm)	φ2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	
GKC-5100-BS	6	37	22	5	7	9.5	14	14	14	12
GKC-5200-BS	8	37	22	6	7	9.5	14	14	14	13
GKC-5300-BS	10	44	27	8	7	11	17	17	17	15
GKC-5400-BS	12	47	28	10	7	12	19	19	19	17
GKC-5020-BS	6.35	37	22	6	7	9.5	14	14	14	12
GKC-5030-BS	9.53	44	27	8	7	11	17	17	17	15
GKC-5040-BS	12.7	53	31	10	8	12.5	21	21	21	19