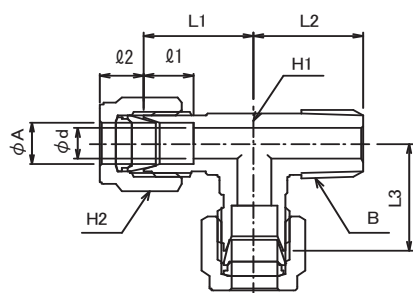


ダブルフェルール式銅管継手【黄銅製】
サービスチーズユニオン


型 式	銅管外径 管用ねじ		本体長さ			最小穴径 d (mm)	差込深さ		対 辺	
	A (mm)	B (R)	L1 (mm)	L2 (mm)	L3 (mm)		ø1 (mm)	ø2 (mm)	H1 (mm)	H2 (mm)
GMRT-6M2R-BS	6	R1/8	19.5	19.5	20	5	8	7	14	14
GMRT-6M4R-BS	6	R1/4	19.5	19.5	20	5	8	7	14	14
GMRT-6M6R-BS	6	R3/8	22	26.5	22.5	5	8	7	17	14
GMRT-6M8R-BS	6	R1/2	24	30	26	5	8	7	19	14
GMRT-8M2R-BS	8	R1/8	19.5	19.5	20	6	9	8	14	16
GMRT-8M4R-BS	8	R1/4	19.5	19.5	20	6	9	8	14	16
GMRT-8M6R-BS	8	R3/8	22	26.5	22.5	6	9	8	17	16
GMRT-8M8R-BS	8	R1/2	24	30	26	6	9	8	19	16
GMRT-10M2R-BS	10	R1/8	23	22	23.5	6	10	9	17	19
GMRT-10M4R-BS	10	R1/4	23	24	23.5	8	10	9	17	19
GMRT-10M6R-BS	10	R3/8	23	26.5	23.5	8	10	9	17	19
GMRT-10M8R-BS	10	R1/2	25	30	27	8	10	9	19	19
GMRT-12M2R-BS	12	R1/8	25	24	27	6	12	10	19	23
GMRT-12M4R-BS	12	R1/4	25	26	27	8	12	10	19	23
GMRT-12M6R-BS	12	R3/8	25	28	27	10	12	10	19	23
GMRT-12M8R-BS	12	R1/2	25	30	27	10	12	10	19	23
GMRT-4T2R-BS	6.35	R1/8	19.5	19.5	20	5	8	7	14	14
GMRT-4T4R-BS	6.35	R1/4	19.5	19.5	20	5	8	7	14	14
GMRT-4T6R-BS	6.35	R3/8	22	26.5	22.5	5	8	7	17	14
GMRT-4T8R-BS	6.35	R1/2	24	30	26	5	8	7	19	14
GMRT-6T2R-BS	9.53	R1/8	23	22	23.5	6	9.5	8	17	17
GMRT-6T4R-BS	9.53	R1/4	23	24	23.5	7	9.5	8	17	17
GMRT-6T6R-BS	9.53	R3/8	23	26.5	23.5	7	9.5	8	17	17
GMRT-6T8R-BS	9.53	R1/2	25	30	27	7	9.5	8	19	17
GMRT-8T2R-BS	12.7	R1/8	25	24	27	6	12	10	19	23
GMRT-8T4R-BS	12.7	R1/4	25	26	27	8	12	10	19	23
GMRT-8T6R-BS	12.7	R3/8	25	28	27	10	12	10	19	23
GMRT-8T8R-BS	12.7	R1/2	25	30	27	10	12	10	19	23